
Twin wire for low-voltage, 2x0.35mm²

Two joined wires that can supply up to 50V. The lack of cape makes the wire very thin and flexible. It is highly usable with LED stripes.



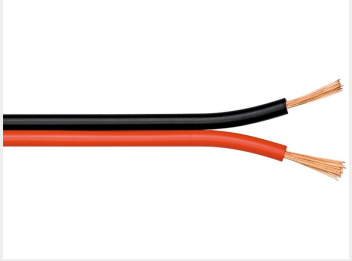

Two joined wires that can supply up to 50 VDC. The lack of cape makes the wire very thin and flexible. It is highly usable with LED stripes, but it can also be used for speakers.

The white and black model has a marking on one of the wires that can be used to mark the positive wire.

Buy online at:

www.matronics.eu/509026

Specifications

Operating temperature	max 70°C
Working-temperature	Min -5°C
Storage temperature	Max 40°C
Conductor	Multi strand copper
Max current	3 Amp.



White - Measured length
SKU 509026




White - 200 meter
SKU 509026R



Black - Measured length
SKU 509027



Black - 200 meter
SKU 509027R



Black / red - Measured length
SKU 509039



Black / red - 100 meter
SKU 509039R

Product pictures





