
M8 bolt with countersunk unbrako head

Countersunk bolt for mounting in countersunk holes. Used when you want a flat mounting surface.



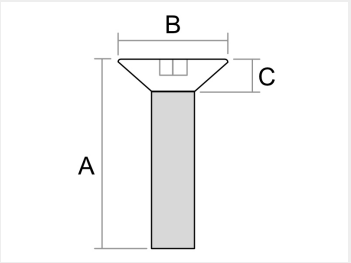

Countersunk bolt for mounting in countersunk holes. Used when you want a flat mounting surface.

The length of countersunk is the total length including the head.

Buy online at:

www.matronics.eu/A008316

Specifications

Head diameter	15,4mm
Head height	5mm



16mm
SKU A008316
Dimensions: mm



20mm
SKU A008320
Dimensions: mm



25mm
SKU A008325
Dimensions: mm



40mm
SKU A008340
Dimensions: mm

Product pictures



