
OZZ SQR LED high-beam with dual position- and strobe light, E- and R65-approved

E-approved square OZZ high beam with powerful high beam, R65-strobe light, and dual color position light. Available with 7" or 9".

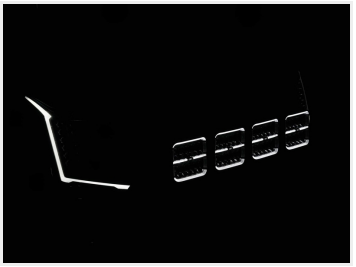

Square E-approved and R65-approved LED high beam light from OZZ which, with its elegant and modern design, offers a unique expression and appearance. The Osram LEDs provide a very powerful light. They are positioned so that they do not necessarily need to be seen.

Additionally, the high beam light features an R65-approved strobe light placed vertically on each side of the lamp. It can also operate with the rest of the position light and be on at the same time.

The LED high-beams are available as SQR 7" with 160W / 14.000 theoretical lumen and as SQR 9" with 240W / 21.000 theoretical lumen.

Dual color position lights allow you to switch between white and yellow position light on any occasion to perfectly match your vehicle. On startup, the position light will begin in a dynamic light that starts from the middle and runs out to each side.

In regards to the light diagram, it shows 1 lux at 650m on the 7" version and 950m on the 9" version with the boost function. You will therefore get more light than the diagram shows and be able to see the reflections in the cones on the side of the road further out.

Both have a non-approved / boost function, which is connected via the socket. If you want to drive approved, you must use the brown wire outside the socket.

The front glass is produced in polycarbonate, and the lamp housing is made of powder-coated aluminum to achieve a sleek design and good cooling for the diodes.

A mounting bracket is attached, and it is delivered with a mounted 6-pin DT connector, which makes installation very simple.

Connection:

- Black: Ground / -
- Brown: High beam (E-approved) (Outside the socket)
- Red: High beam (Boost / NOT E-approved)
- White: White position light
- Yellow: Yellow position light
- Blue: Strobe light
- Green: Synchronization

Approval: ECE, R112, R149 R148, R10, R65, CE

Buy online at:

www.matronics.eu/24606592



7 Inch, Black
SKU 24606592
LEDs: 16 x OSRAM
Voltage: 9-32V DC
Consumption: 160W
Lumen theoretical: 14000lm
Lumen effective: 8000lm
Reference: 50
Kelvin: 5000K
Operating temperature: – 40°C to +60°C
Consumption 12V / 24V: 9,10A / 4,60A
Dimensions: 85 x 178 x 178mm



9 Inch, Black
SKU 24606594
LEDs: 24 x OSRAM
Voltage: 9-32V DC
Consumption: 240W
Lumen theoretical: 21000lm
Lumen effective: 12000lm
Reference: 50
Kelvin: 5000K
Operating temperature: – 40°C to +60°C
Consumption 12V / 24V: 13,5A / 7,0A
Dimensions: 95 x 210 x 210mm

Product pictures







